

For better tasting fountain beverages that stay carbonated longer. Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear.

BENEFITS

- Removes chlorine and other off tastes and odors that can spoil a drink
- Filters out dirt larger than one-half micron in size
- Removes asbestos fibers, and cysts such as *Cryptosporidium* and *Giardia*
- Keeps drinks carbonated longer
- Increases life of drink system
- Allows BRIX to stay within manufacturers recommendation
- NSF Certified under Standards 42 and 53

APPLICATION/SIZING

Single: Dispensers with single carbonator or using up to 25 tanks of syrup or bag-in-box per month

Twin: Dispensers with single carbonator or using up to 50 tanks of syrup or bag-in-box per month

Triple: Dispensers with double carbonator and using more than 50 tanks of syrup or bag-in-box per month



A.



B.



C.

A. QC71-MC Single System
Head: Part No. 9275-01

B. QC71-MC Twin System
Head: Part No. 9275-02

C. QC71-MC Triple System
Head: Part No. 9275-03

For high flow, high volume post mix applications, order the High Flow Water Filter 9337-11. See Pub. No. 20074 for more information.

The QC71-MC series is available on a convenient mounting plate, which includes the filter plus a 10" prefilter. These are called ColDrink® Systems.

INSTALLATION TIPS

- Choose a mounting location which is suitable to support the full weight of the system when operating
- Use a 3/8" water line
- Do not braze/solder fittings into head
- Never use a saddle valve for connection
- Do not exceed service flow rate (refer to other side)
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes**

OPERATION TIPS

- Change cartridges:
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi *when the system is operating.*
 - or at least annually

Always flush the filter cartridges when changing.

SPECIFICATIONS

Dimensions: Single 29"H x 5-1/2"W x 5"D

Twin 25"H x 11"W x 5"D

Triple 25"H x 15"W x 5"D

("H" dimension includes 2-1/2"
clearance for cartridge changing)

Minimum inlet connection: 3/8" OD tubing

Service flow rate:

Minimum: Single .25 gpm

Twin .75 gpm

Triple .75 gpm

Maximum: Single 1.67 gpm

Twin 3.34 gpm

Triple 5.0 gpm

Working pressure: 20-125 psi, non-shock

Maximum temperature: 100°F (38°C)

No electrical connections required.

Shipping weight: Single 8 lbs.

Twin 10 lbs.


Triple 14 lbs.

Operating weight: Single 14 lbs.

Twin 22 lbs.

Triple 32 lbs.

Inlet/Outlet connection: 3/8" female pipe thread

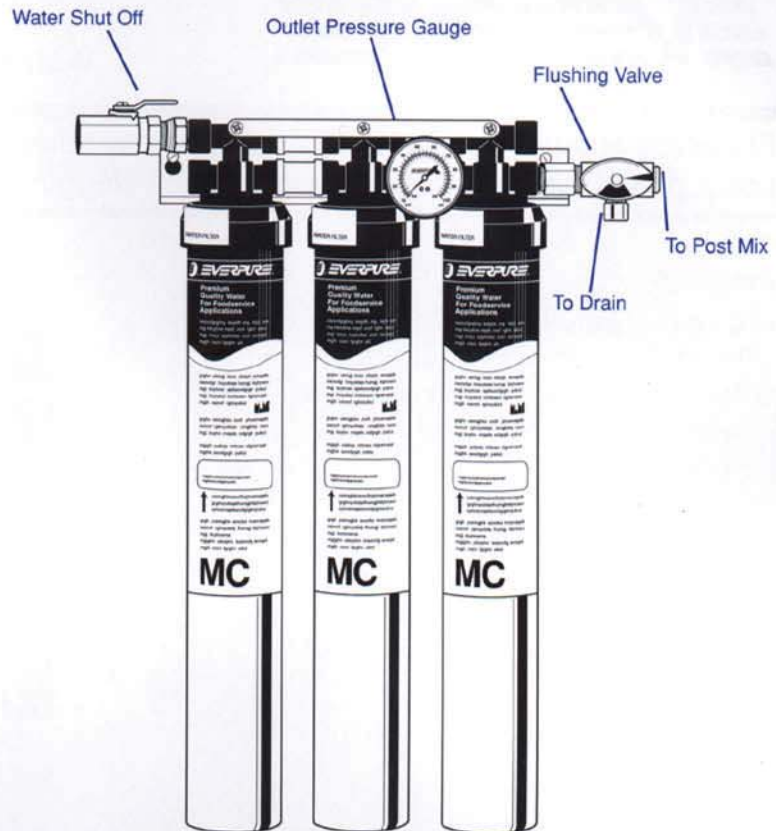

Pictured here is the QC71-MC Triple.
Connections are similar for the single and twin systems.

LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or twelve months after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.



Tested and Certified
to ANS/NSF
Standards 42 & 53

NSF International Standards

STANDARD NO. 42: AESTHETIC EFFECTS

Chemical Unit

Taste & Odor Reduction

Chlorine Reduction: Class I

Mechanical Filtration Unit

Particulate Reduction: Class I

(99.9% reduction of particles one-half
micron and larger in size)

STANDARD NO. 53: HEALTH EFFECTS

Mechanical Filtration Unit

Turbidity Reduction

Cyst Reduction

Asbestos Reduction

The MC filter cartridge has been tested and listed by NSF only for the functions listed above. Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with waters of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

EVERPURE
WATER YOU CAN TRUST.