



InsurIce™ 2000 Single and Twin Water Filter for Ice Makers

Part No 9324-01

9324-02

**For a dramatic reduction of the most common water-related ice machine problems:
scale buildup from dirt and dissolved minerals in the water.**

BENEFITS

- Removes common off-tastes and odors, such as chlorine
- Reduces dirt as small as one-half micron
- Reduces cysts and asbestos fibers
- Reduces scale build up
- Reduces machine maintenance
- Reduces down time
- Saves energy
- Keeps ice maker functioning at full capacity



APPLICATION/SIZING

Cubers—up to 750
lbs./day
Flakers—up to 1500
lbs./day
Max. service flow rate:
1.67 gpm



APPLICATION/SIZING

Cubers—up to 1450
lbs./day
Flakers—up to 2200
lbs./day
Max. service flow rate:
3.34 gpm

System Part No.: 9324-01
Replacement 2000 Cartridge: 9612-21

InsurIce 2000 Twin: 9324-02
Replacement 2000 Cartridge: 9612-21

INSTALLATION TIPS


- Never use saddle valve for connection
- Use a minimum of 3/8" water line
- Use backup wrench when installing inlet and outlet fittings.
- For single, do not exceed 1.67 gpm flow rate
For twin, do not exceed 3.34 gpm flow rate
- Must not be connected to water cooled condenser
- Install no further than 25' away from ice maker
- **Flush filter cartridges by running water to drain for five minutes through the cartridges**

OPERATION TIPS

- Change cartridges:
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi *when the ice machine calls for water;*
 - or at least annually

SPECIFICATIONS:

Dimensions: 29"H x 7"W x 7"D
 (includes 2-1/2" for cartridge change)
 Inlet valve connection: 3/8" FPT
 Service flow rate: Minimum 0.1 gpm
 Maximum 1.67 gpm
 Pressure: Minimum 10 psi
 Maximum 125 psi (non-shock)
 Maximum temperature: 100°F (38°C)
 Shipping weight: 7.5 lbs.
 Operating weight: 14 lbs.

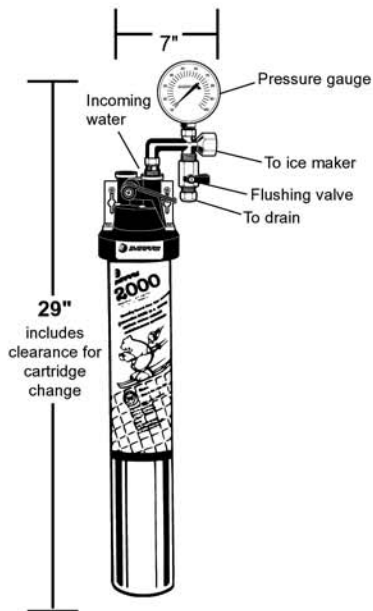

LIMITED WARRANTY OF PHYSICAL QUALITY



If, within eighteen months after manufacture or twelve months after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.



SPECIFICATIONS

Dimensions: 28"H x 14"W x 7"D
 (includes 2-1/2" for cartridge change)
 Inlet valve connection: 3/8" FPT
 Service flow rate: Minimum: 0.6 gpm
 Maximum: 3.34 psi
 Pressure: Minimum: 10 psi
 Maximum: 125 psi
 Maximum temperature: 100°F (38°C)
 No electrical connections required
 Shipping weight: 15 lbs.
 Operating weight: 28 lbs.

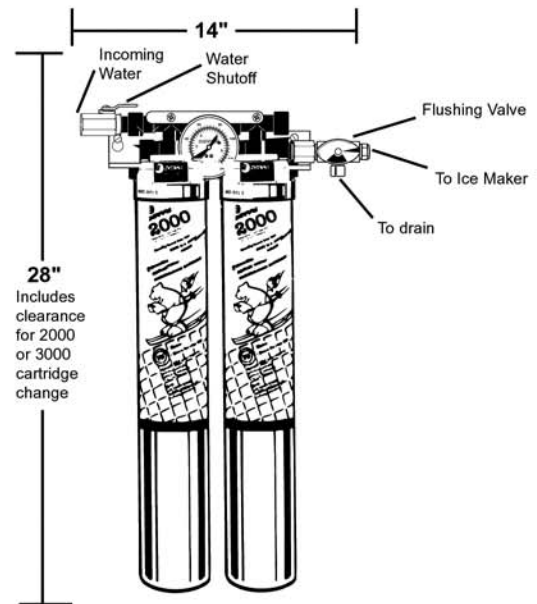

Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with water of unknown quality without adequate disinfection before or after the unit. May be used on disinfected water which may contain filterable cysts.

EVERPURE
 WATER YOU CAN TRUST®