



InsurIce 4000 Triple & Quad Water Filters for Ice Makers

Triple 9325-03 • Quad 9325-04

Our largest, high capacity systems designed to meet the higher flow rates of larger commercial ice makers. Precoat filtration coupled with scale inhibitor.



Triple System: 9325-03
4000 Cartridge: P/N 9612-36



Quad System: 9325-04
4000 Cartridge: P/N 9612-36

BENEFITS

- Traps dirt as small as 1/2 micron in size
- Reduces off-tastes and odors, and chlorine
- Keeps ice makers functioning at full capacity by reducing lime scale buildup in water distribution lines, small orifices, and on evaporator plates
- Better tasting beverages
- Reduces parasitic cysts such as *Cryptosporidium* and *Giardia*
- Saves energy and reduces downtime

INSTALLATION TIPS

- Choose a mounting location which is suitable to support the full weight of the system when operating
- Use a minimum 1/2" water line.
- Do not connect system to water-cooled condenser.
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes.**

OPERATION TIPS

- Change 4000 series cartridges
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi *when the system is operating.*
 - or at least annually
- Always flush the filter cartridges when changing.**

SPECIFICATIONS: Triple

Dimensions: 29-1/2"H x 15-1/2"W x 5"D

(includes 2-1/2" for cartridge change)

Inlet valve connection: 1/2" FPT

Service flow rate: Minimum .5 gpm
Maximum 5.0 gpm

Pressure: Minimum 10 psi
Maximum 125 psi (non-shock)

Maximum temperature: 100°F (38°C)

Shipping weight: 23 lbs.

Operating weight: 38 lbs.

SPECIFICATIONS: Quad

Dimensions: 29-1/2"H x 21"W x 5"D

(includes 2-1/2" for cartridge change)

Inlet valve connection: 3/4" FPT


Service flow rate: Minimum .5 gpm
Maximum 7.3 gpm

Pressure: Minimum 10 psi
Maximum 125 psi (non-shock)

Maximum temperature: 100°F (38°C)

Shipping weight: 27 lbs.

Operating weight: 42 lbs.

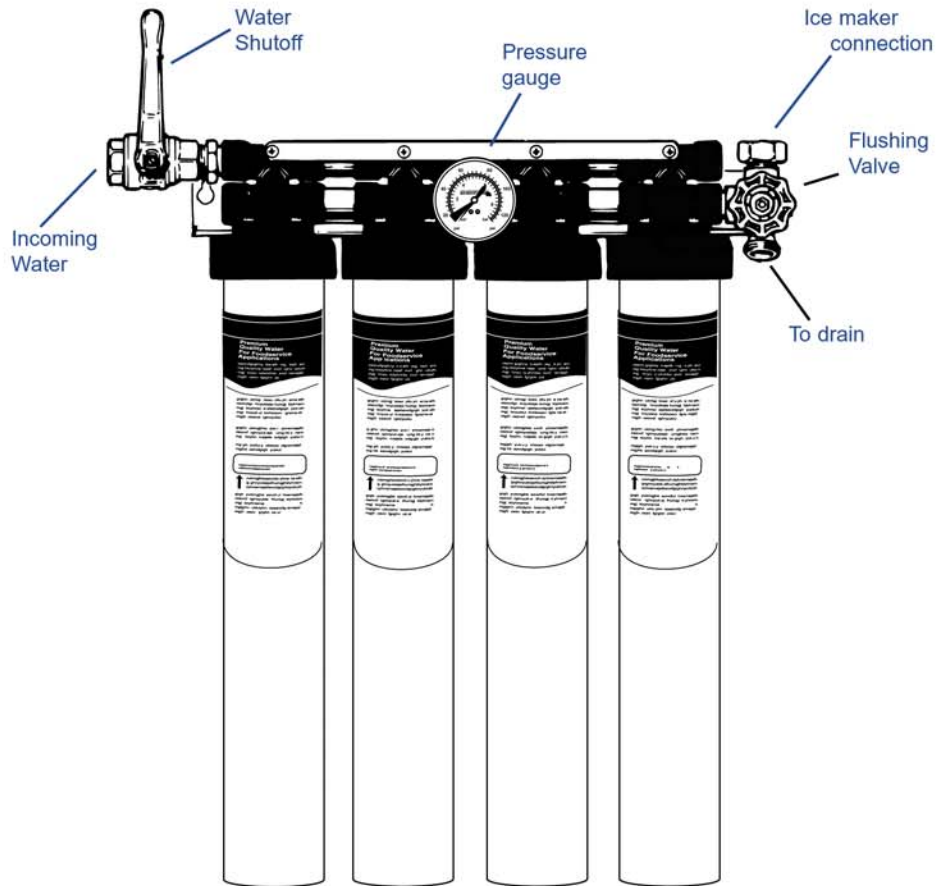

- quad system illustrated -

LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or twelve months after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.



System Tested and Certified by NSF International against ANSI/NSF Standard 42 and 53 for the reduction of:

- Standard No. 42: Aesthetic Effects
Chemical Unit
Taste and Odor Reduction
Chlorine Reduction, Class I
Mechanical Filtration Unit
Particulate Reduction, Class I:
99.9+% reduction of particles one-half micron and larger in size
- Standard No. 53: Health Effects
Chemical Reduction Unit
Mechanical Filtration Unit
Turbidity Reduction
Cyst Reduction
Asbestos Reduction

Check for compliance with state and local laws and regulations. Do not use with water that is microbiologically unsafe, or of unknown quality without adequate disinfection before or after the system. May be used with disinfected water where filterable cysts may be present. Systems certified for Cyst reduction may be used with disinfected water that may contain filterable cysts.

EVERPURE
WATER YOU CAN TRUST