



High Flow Triple Water Filter

One system to handle the water filtration requirements for coffee/espresso, ice and fountain.

9328-05

BENEFITS

- Reduces chlorine and other off-tastes and odors.
- Reduces dirt and other particulate matter 1/2 micron and larger in size.
- Traps harmful parasitic cysts such as Cryptosporidium.
- Reduces asbestos fibers.
- Increases the overall energy efficiency of foodservice equipment.
- The prefilter extends the life of the MC cartridges.
- The IMF cartridge feeds controlled amounts of food-grade polyphosphate into the finished water, inhibiting limescale buildup.
- Listed under NSF International Standards 42 & 53



APPLICATION

Combination of coffee brewers, espresso machines, hot chocolate dispensers, fountain and ice machines.

High Flow Triple System: 9328-05
System without Low Pressure Alarm: 9328-06
MC Cartridge (1 pack): 9612-06
MC Cartridge (6 pack): 9612-05
EC210 Cartridge (6-pack): 9534-26
EC210 Cartridge (20-pack): 9534-20
IMF Replacement Cartridge (1 pack): 9498-41

INSTALLATION TIPS

- Choose a mounting location which is suitable to support the full weight of the system when operating (47 lbs.)
- Use a minimum 1/2" water line (3/4" preferred)
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes.**

OPERATION TIPS

- Change precoat filter cartridges
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi *when the system is operating.*
 - or at least annually

Always flush the filter cartridges when changing.

SPECIFICATIONS

Dimensions: 32"H x 36"W x 8"D

Inlet connection: 3/4" FPT

Service flow rate: Minimum .04 gpm
Maximum 5.0 gpm

Pressure: Minimum 20 psi
Maximum 125 psi (non-shock)


Maximum temperature: 100°F (38°C)

110V electrical connection required
for Low Pressure Alarm

Shipping weight: 30 lbs.

Operating weight: 47 lbs.

Plumbers note: There is a lateral
elevation drop of 1.1" from the
left to right stub-outs.

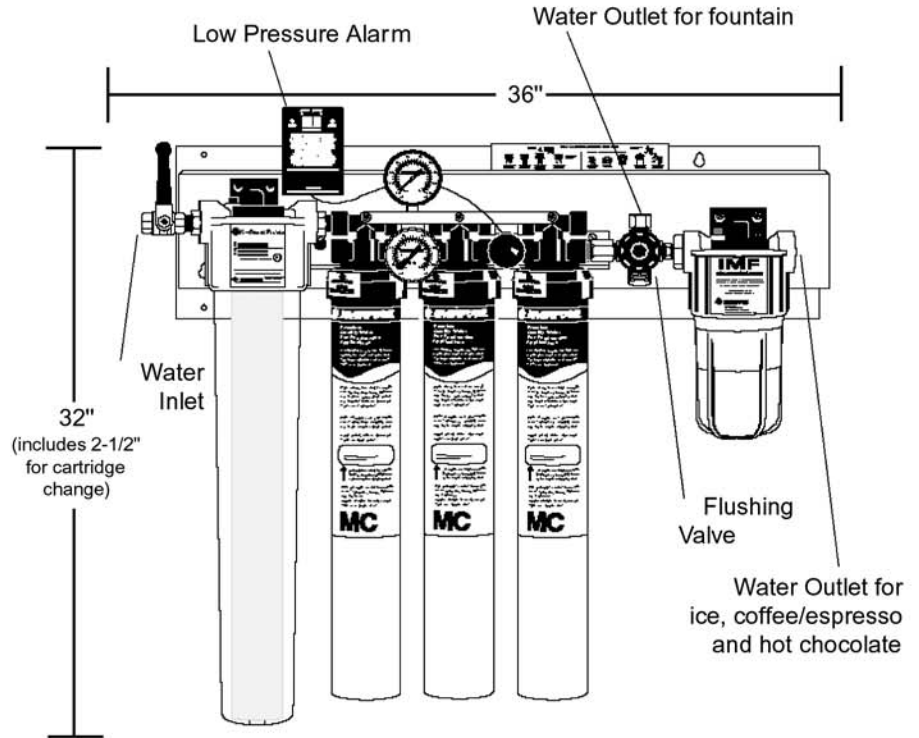

NSF's Certification Program
is accredited by the American
National Standards Institute



NSF's Certification Program
is accredited by the Dutch
Council for Accreditation

LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or ten years after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.

System Tested and Certified by NSF
International against ANSI/NSF
Standard 42 and 53 for the reduction of:

Standard No. 42: Aesthetic Effects
Chemical Unit
Taste and Odor Reduction
Chlorine Reduction, Class I
Mechanical Filtration Unit
Particulate Reduction, Class I:
99.9+% reduction of particles
one-half micron and larger in size
Standard No. 53: Health Effects
Mechanical Filtration Unit
Turbidity Reduction
Cyst Reduction
Asbestos Reduction

Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with waters of unknown quality without adequate disinfection before or after the unit. May be used with disinfected water where filterable cysts may be present.

EVERPURE
WATER YOU CAN TRUST.