



High Flow Water Filter

For High Flow, High Volume Fountain Applications

9337-11

For better tasting fountain beverages that stay carbonated longer. Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear.

BENEFITS

- Removes chlorine and other off tastes and odors.
- Exclusive precoat design filters out dirt down to one-half micron in size.
- Removes harmful asbestos fibers and cysts such as *Cryptosporidium* and *Giardia*.
- Keeps drinks carbonated longer.
- Increases life of drink system.
- Allows BRIX to stay within manufacturer's recommendation.
- Water shut-off valve and inlet/outlet pressure gauges
- NSF Certified and Tested under Standards 42 and 53



APPLICATION/SIZING

Fountain systems with up to 4 carbonators — 440 gallons per hour.

High Flow Water Filter System: 9337-11
MC Replacement Cartridge (1 pk.): 9612-06
MC Replacement Cartridge (6 pk.): 9612-05

INSTALLATION TIPS

- Choose a mounting location which is suitable to support the full weight of the system when operating
- Use a 3/4" water line
- Do not braze/solder fittings into head
- Never use a saddle valve for connection
- Do not exceed service flow rate (refer to other side)
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes**

OPERATION TIPS

- Change cartridges:
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi *when the system is operating*.
 - or at least annually

Always flush the filter cartridges when changing.

SPECIFICATIONS

Dimensions: 29"H x 24"W x 9"D
 ("H" dimension includes 2-1/2" clearance for cartridge changing)

Inlet connection: 3/4" FPT

Service flow rate:

Minimum: 1 gpm

Maximum: 7.3 gpm


Working pressure: 10-125 psi, non-shock

Maximum temperature: 100°F (38°C)

No electrical connections required.

Shipping weight: 26 lbs.

Operating weight: 40 lbs.

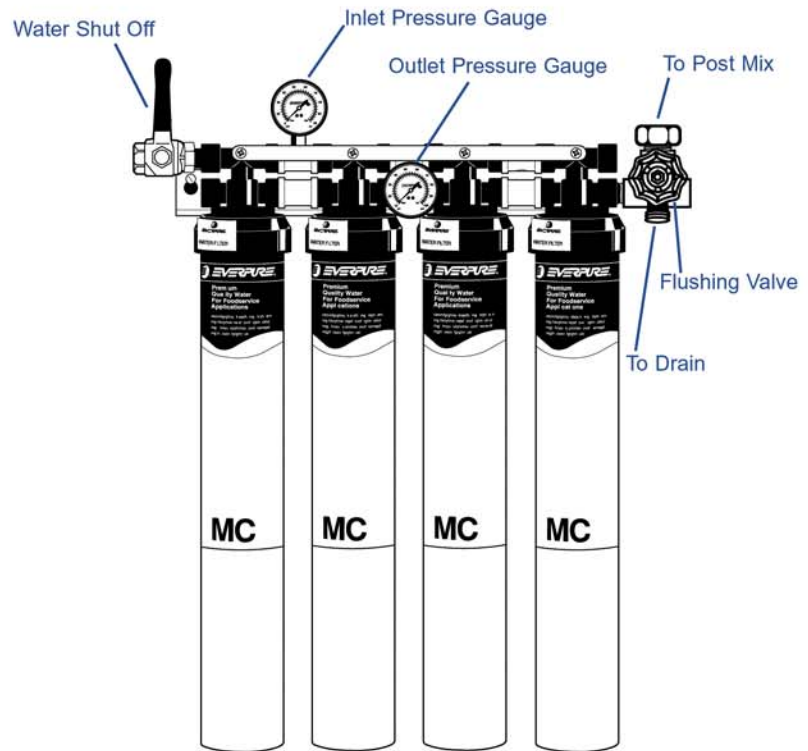

LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or twelve months after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.



System Tested and Certified by NSF International against ANSI/NSF Standard 42 and 53 for the reduction of:

- Standard No. 42: Aesthetic Effects
 - Chemical Unit
 - Taste and Odor Reduction
 - Chlorine Reduction, Class I
 - Mechanical Filtration Unit
 - Particulate Reduction, Class I:
 - 99.9+% reduction of particles one-half micron and larger in size
- Standard No. 53: Health Effects
 - Mechanical Filtration Unit
 - Turbidity Reduction
 - Cyst Reduction
 - Asbestos Reduction

Do not use with water that is microbiologically unsafe, or of unknown quality without adequate disinfection before or after the system. Systems certified for Cyst reduction may be used with disinfected water that may contain filterable cysts.

