




High Flow System CSR 9437-11 9338-00

One system to provide quality water to high flow fountain dispensers, coffee makers and ice machines

BENEFITS

- Reduces chlorine and other off-tastes and odors.
- Reduces dirt and other particulate matter 1/2 micron and larger in size.
- Traps harmful parasitic cysts such as Cryptosporidium.
- Reduces asbestos fibers.
- Increases the overall energy efficiency of foodservice equipment.
- The prefilter extends the life of the MC cartridges (9437-11).
- The IMF cartridge feeds controlled amounts of food-grade polyphosphate into the finished water, inhibiting limescale buildup.
- Listed under NSF International Standards 42 & 53

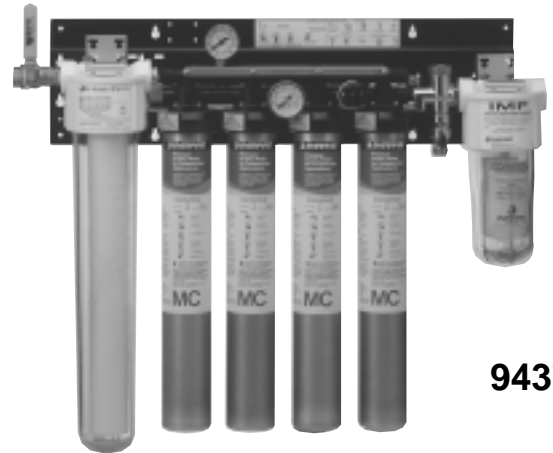

9437-11

Includes: K-20 Pre-filter and Low Pressure Alarm

APPLICATION/SIZING

Fountain systems with up to 4 carbonators combined with a four pot coffee brewer and 1,200 pound ice maker

High Flow System CSR: 9437-11
High Flow System CSR: 9338-00
High Flow System CSR w/o LPA: 9437-10
MC Cartridge: 9612-06
EC210 Cartridge 20 pack: 9534-20
EC210 Cartridge 6 pack: 9534-26
IMF Cartridge: 9498-41



9338-00

INSTALLATION TIPS

- Choose a mounting location which is suitable to support the full weight of the system when operating up to (49 lbs.)
- Use a minimum 3/4" water line
- Never use a saddle valve for connection
- Fountain equipment connections are made to the outlet part of system before the IMF feeder
- Coffee brewer and ice maker connections are made after the IMF feeder; a tee is required
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes.**

OPERATION TIPS

- Change precoat filter cartridges
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi when the system is operating.
 - or at least annually
 - Change the IMF cartridge when the level of white inhibitor material drops below the cartridge label.
 - Change the prefilter cartridge when excessively dirty.
- Always flush the filter cartridges when changing.**

SPECIFICATIONS

Dimensions: 34"H x 36"W x 8"D

Inlet connection: 3/4" FPT

Service flow rate: Minimum .04 gpm
Maximum 7.3 gpm

Pressure: Minimum 20 psi
Maximum 125 psi (non-shock)

Maximum temperature: 100°F (38°C)

110V electrical connection required
for Low Pressure Alarm

Shipping weight: 34 lbs.

Operating weight: 49 lbs.

Plumbers note: There is a lateral elevation drop of 1.1" from the left to right stub-outs.

SPECIFICATIONS

Dimensions: 34"H x 33"W x 9"D

Inlet connection: 3/4" FPT

Service flow rate: Minimum .04 gpm
Maximum 7.3 gpm

Pressure: Minimum 20 psi
Maximum 125 psi (non-shock)

Maximum temperature: 100°F (38°C)

No electrical connection required


Shipping weight: 30 lbs.

Operating weight: 45 lbs.


LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or ten years after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.


NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.

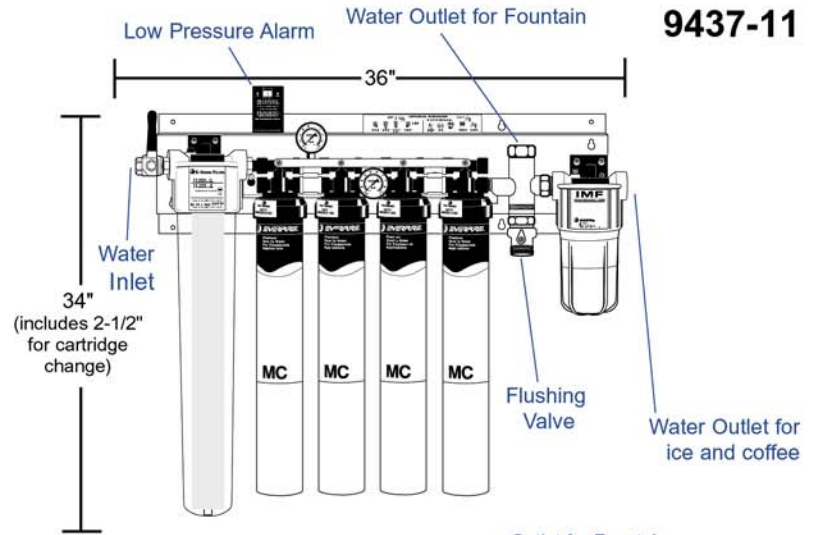

9437-11

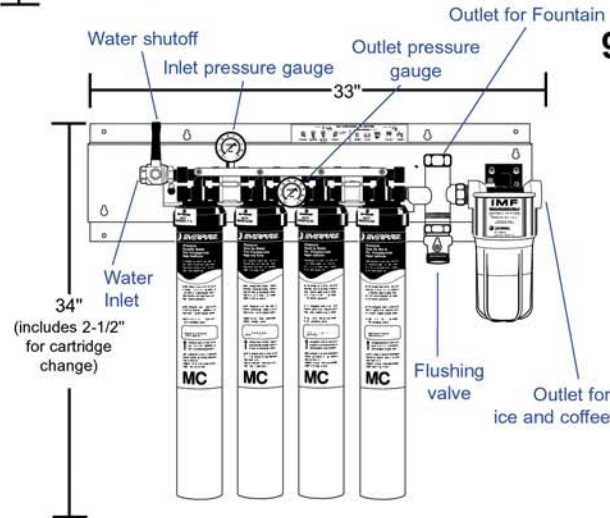

9338-00



Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with waters of unknown quality without adequate disinfection before or after the unit. May be used with disinfected water where filterable cysts may be present.

EVERPURE
WATER YOU CAN TRUST®